40x40x28 mm

12.8~31.3 CFM




Specification

Model	Bearing	Rated Voltage	Power Current	Power Consumption	Speed	Airflow	Static Pressure	Noise	Weight	Curve
	● 2BALL ○ Sleeve	(VDC)	(mA)	(WATTS)	(RPM)	(CFM)	(inch-H_2O)	(dB(A))	(g)	
PF40281BX-10000-A9H	●	12	950	11.4	22000	31.3	3.12	62.0	42.0	1
PF40281B1-10000-A9H	●	12	510	6.12	17600	24.9	2.05	56.0	42.0	2
PF40281B2-10000-A9H	●	12	220	2.64	13000	18.0	1.16	48.7	42.0	3
PF40281B3-10000-A9H	●	12	145	1.74	11000	15.4	0.78	43.9	42.0	4
PF40281B4-10000-A9H	●	12	96	1.16	9200	12.8	0.60	39.9	42.0	5


Function

R Type : F9H ／ F Type : G9H ／ PWM : H9H, Q9H, S9H

Air Flow-Static Pressure Characteristics

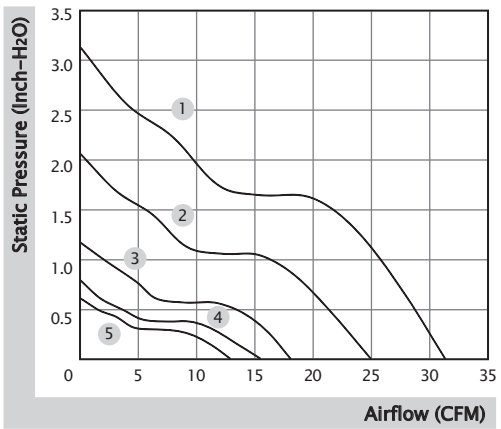

External Dimensions(mm)

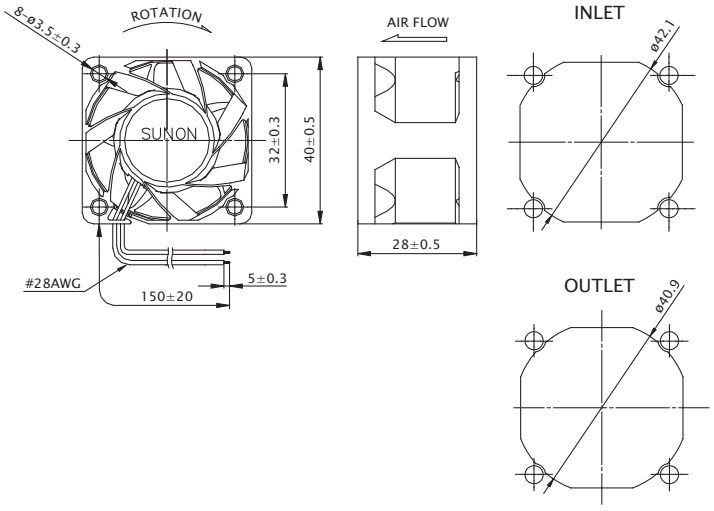

Beijing Hengrui Mechanical and Electrical Equipment Co,Ltd
+86 10-62547612
zhangyu@bjhengrui.cn
en.bjhengrui.com

40x40x28 mm (IP68 / GR487)

14.1~23.9 CFM




Specification

Model	Bearing	Rated Voltage	Power Current	Power Consumption	Speed	Airflow	Static Pressure	Noise	Weight	Curve
	● 2BALL ○ Sleeve	(VDC)	(mA)	(WATTS)	(RPM)	(CFM)	(inch-H_2O)	(dB(A))	(g)	
GF40282BX-10000-AEP	●	24	400	9.60	17600	23.9	2.01	58.5	46.0	1
GF40282B1-10000-AEP	●	24	230	5.52	14600	19.6	1.38	52.8	46.0	2
GF40282B2-10000-AEP	●	24	180	4.32	13100	17.7	1.11	50.0	46.0	3
GF40282B3-10000-AEP	●	24	117	2.81	10500	14.1	0.71	45.0	46.0	4
GF40282BX-10000-ADP	●	24	400	9.60	17600	23.9	2.01	58.5	46.0	1
GF40282B1-10000-ADP	●	24	230	5.52	14600	19.6	1.38	52.8	46.0	2
GF40282B2-10000-ADP	●	24	180	4.32	13100	17.7	1.11	50.0	46.0	3
GF40282B3-10000-ADP	●	24	117	2.81	10500	14.1	0.71	45.0	46.0	4


Function

(IP68) R Type : FEP ／ F Type : GEP ／ PWM : HEP, QEP, SEP
(GR487) R Type : FDP ／ F Type : GDP ／ PWM : HDP, QDP, SDP

Air Flow-Static Pressure Characteristics

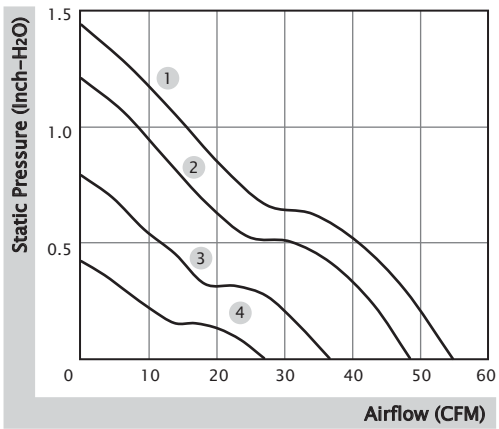

External Dimensions(mm)

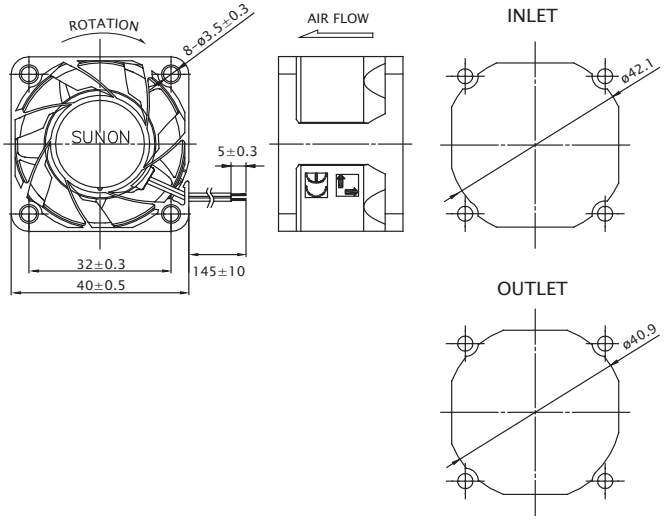

Beijing Hengrui Mechanical and Electrical Equipment Co,Ltd
+86 10-62547612
zhangyu@bjhengrui.cn
en.bjhengrui.com

40x40x56 mm

26.9~31.7 CFM




Specification

Model	Bearing	Rated Voltage	Power Current	Power Consumption	Speed	Airflow	Static Pressure	Noise	Weight	Curve
	● 2BALL ○ Sleeve	(VDC)	(mA)	(WATTS)	(RPM)	(CFM)	(inch-H_2O)	(dB(A))	(g)	
PF40561BX-10000-A9H	●	12	1390	16.68	21500/18000	31.7	3.76	65.9	87.0	1
PF40561B1-10000-A9H	●	12	890	10.68	18000/15000	26.9	2.64	62.3	87.0	2


Function

R Type : F9H ／ F Type : G9H ／ PWM : H9H, Q9H, S9H

External dimensions(mm)

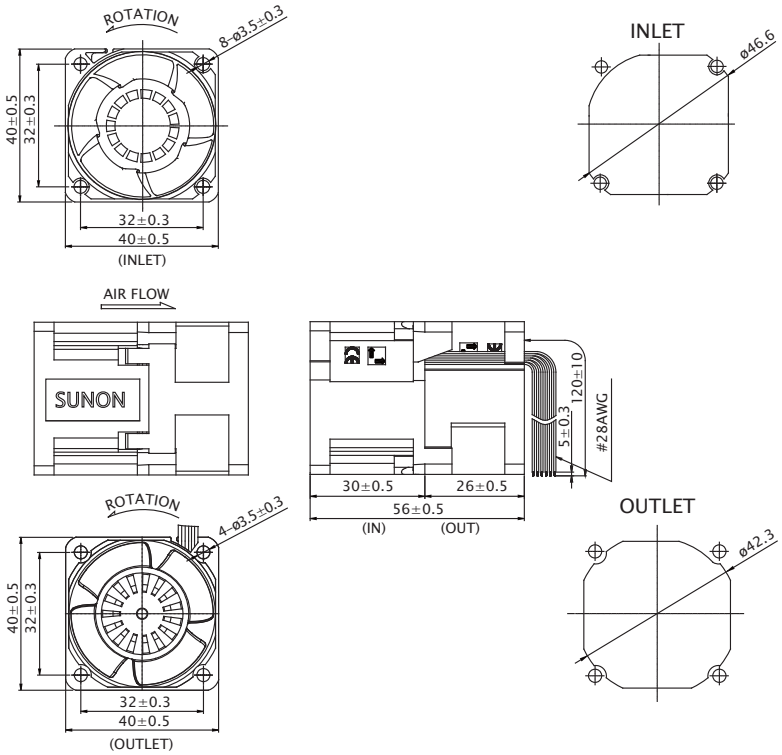

Air Flow-Static Pressure Characteristics

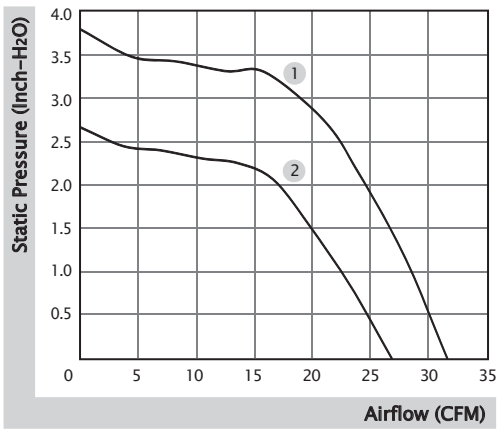

Beijing Hengrui Mechanical and Electrical Equipment Co,Ltd
+86 10-62547612
zhangyu@bjhengrui.cn
en.bjhengrui.com