120x120x38 mm

170.0~190.0 CFM




Specification


Model	Bearing	Rated Voltage	Power Current	Power Consumption	Speed	Airflow	Static Pressure	Noise	Weight	Curve
	● 2BALL ○ Sleeve	(VDC)	(mA)	(WATTS)	(RPM)	(CFM)	(inch-H_2O)	(dB(A))	(g)	
PMD1212PMB1-A (2).GN	●	12	1600	19.2	4200	190.0	0.65	54.0	330.0	1
PMD1212PMB2-A (2).GN	●	12	1200	14.4	3800	170.0	0.54	51.0	330.0	2
PMD2412PMB1-A (2).GN	●	24	760	18.2	4200	190.0	0.65	54.0	330.0	1
PMD2412PMB2-A (2).GN	●	24	570	13.7	3800	170.0	0.54	51.0	330.0	2

Function R Type : (2).R.GN ／ F Type : (2).F.GN

Air Flow-Static Pressure Characteristics

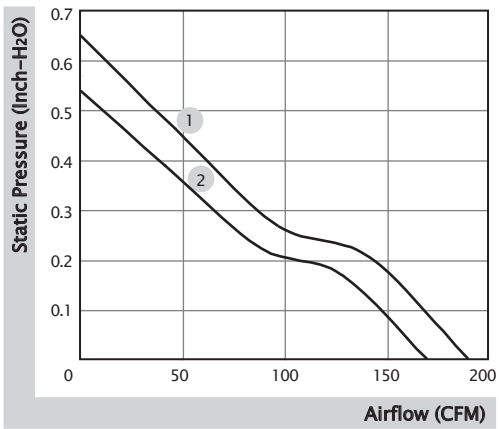

External Dimensions(mm)

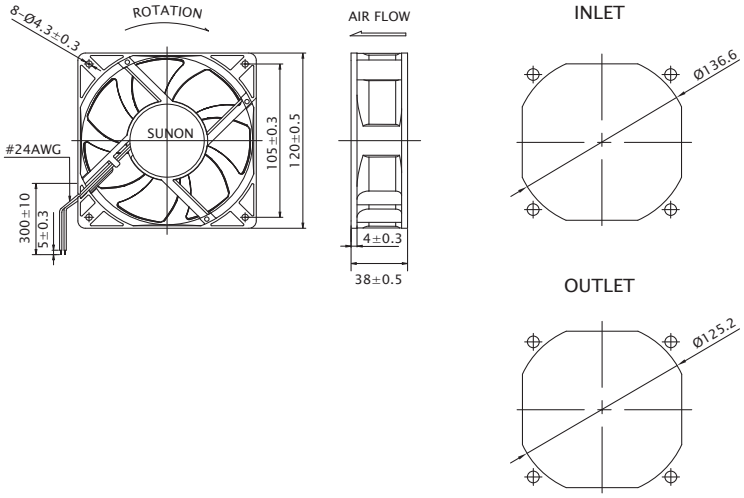

Beijing Hengrui Mechanical and Electrical Equipment Co,Ltd
+86 10-62547612
zhangyu@bjhengrui.cn
en.bjhengrui.com

120x120x38 mm

93.0~138.0 CFM




Specification


MAGLev by SUNON	Bearing	Rated Voltage	Power Current	Power Consumption	Speed	Airflow	Static Pressure	Noise	Weight	Curve
	● VAPO	(VDC)	(mA)	(WATTS)	(RPM)	(CFM)	(inch-H_2O)	(dB(A))	(g)	
MEC0381V1-0000-A99	●	12	833	10.0	3100	138.0	0.36	48.0	218.0	1
MEC0381V2-0000-A99	●	12	421	5.1	2600	116.0	0.26	44.0	218.0	2
MEC0381V3-0000-A99	●	12	241	2.9	2100	93.0	0.18	37.0	218.0	3
MEC0382V1-0000-A99	●	24	383	9.2	3100	138.0	0.36	48.0	218.0	1
MEC0382V2-0000-A99	●	24	224	5.4	2600	116.0	0.26	44.0	218.0	2
MEC0382V3-0000-A99	●	24	130	3.1	2100	93.0	0.18	37.0	218.0	3
Model	◔ 2BALL ○ Sleeve	(VDC)	(mA)	(WATTS)	(RPM)	(CFM)	(inch-H_2O)	(dB(A))	(g)	
EEC0384B1-0000-A99	◔	48	203	9.7	3100	138.0	0.36	48.0	214.0	1
EEC0384B2-0000-A99	◔	48	120	5.8	2600	116.0	0.26	44.0	214.0	2
EEC0384B3-0000-A99	◔	48	69	3.3	2100	93.0	0.18	37.0	214.0	3

Function R Type : F99 ／ F Type : G99

Air Flow-Static Pressure Characteristics

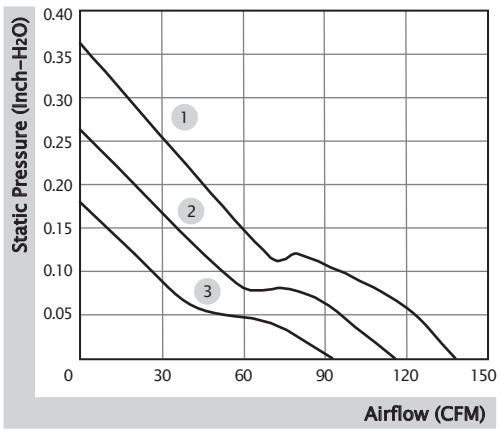

External Dimensions(mm)

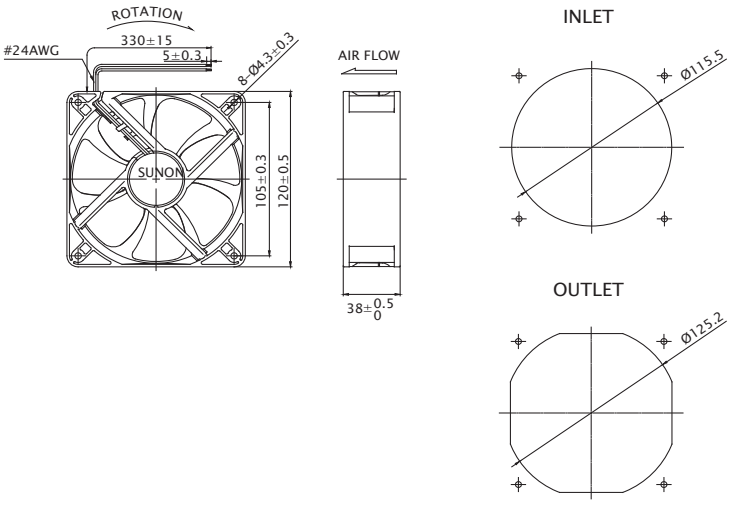

Beijing Hengrui Mechanical and Electrical Equipment Co,Ltd
+86 10-62547612
zhangyu@bjhengrui.cn
en.bjhengrui.com

120x120x38 mm

93.0~138.0 CFM




Specification

Model	Bearing	Rated Voltage	Power Current	Power Consumption	Speed	Airflow	Static Pressure	Noise	Weight	Curve
	● 2BALL ○ Sleeve	(VDC)	(mA)	(WATTS)	(RPM)	(CFM)	(inch-H_2O)	(dB(A))	(g)	
EFC0381B1-10000-A9H	●	12	355	4.26	3700	138.0	0.40	48.0	248.0	1
EFC0381B2-10000-A9H	●	12	245	2.94	3100	116.0	0.29	43.2	248.0	2
EFC0381B3-10000-A9H	●	12	125	1.50	2400	93.0	0.19	36.0	248.0	3
EFC0382B1-10000-A9H	●	24	195	4.68	3700	138.0	0.40	48.0	248.0	1
EFC0382B2-10000-A9H	●	24	135	3.24	3100	116.0	0.29	43.2	248.0	2
EFC0382B3-10000-A9H	●	24	75	1.80	2400	93.0	0.19	36.0	248.0	3


Function

R Type : F9H ／ F Type : G9H ／ PWM : H9H, Q9H, S9H

Air Flow-Static Pressure Characteristics

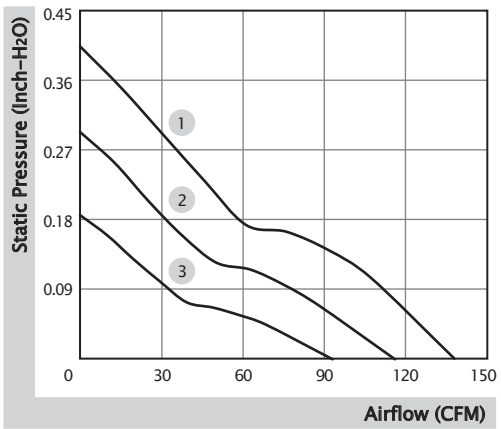

External Dimensions(mm)

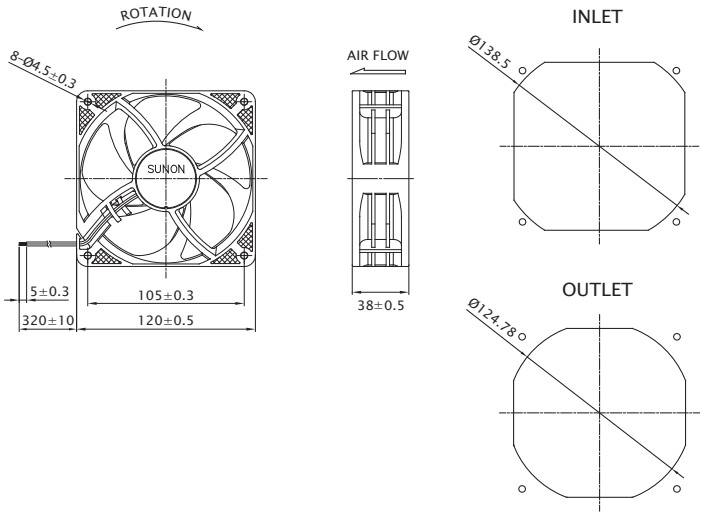

Beijing Hengrui Mechanical and Electrical Equipment Co,Ltd
+86 10-62547612
zhangyu@bjhengrui.cn
en.bjhengrui.com