92x92x25 mm (IP68)

39.5~75.0 CFM




Specification

Model	Bearing	Rated Voltage	Power Current	Power Consumption	Speed	Airflow	Static Pressure	Noise	Weight	Curve
	● 2BALL ○ Sleeve	(VDC)	(mA)	(WATTS)	(RPM)	(CFM)	(inch-H_2O)	(dB(A))	(g)	
GF92251B1-0000-AE9	●	12	393	4.72	4500	75.0	0.35	47.0	113.0	1
GF92251B2-0000-AE9	●	12	300	3.60	4200	70.0	0.30	45.0	113.0	2
GF92251B3-0000-AE9	●	12	230	2.76	3900	65.0	0.25	43.0	113.0	3
GF92251B5-0000-AE9	●	12	165	1.98	3000	51.5	0.15	34.0	99.0	4
GF92251B6-0000-AE9	●	12	135	1.62	2700	45.0	0.13	32.0	99.0	5
GF92251B7-0000-AE9	●	12	91	1.10	2400	39.5	0.10	28.0	99.0	6
GE92252B1-0000-AE9	●	24	220	5.28	4500	75.0	0.35	47.0	113.0	1
GE92252B2-0000-AE9	●	24	180	4.32	4200	70.0	0.30	45.0	113.0	2
GE92252B3-0000-AE9	●	24	155	3.72	3900	65.0	0.25	43.0	113.0	3
GF92252B5-0000-AE9	●	24	87	2.09	3000	51.5	0.15	34.0	99.0	4
GF92252B6-0000-AE9	●	24	65	1.56	2700	45.0	0.13	32.0	99.0	5
GF92252B7-0000-AE9	●	24	47	1.13	2400	39.5	0.10	28.0	99.0	6


Function

(Speed 1, 2, 3) R Type : FE9 ／ F Type : GE9 ／ PWM : HE9, QE9, SE9
(Speed 4, 5, 6) R Type : FE9 ／ F Type : GE9

Air Flow-Static Pressure Characteristics

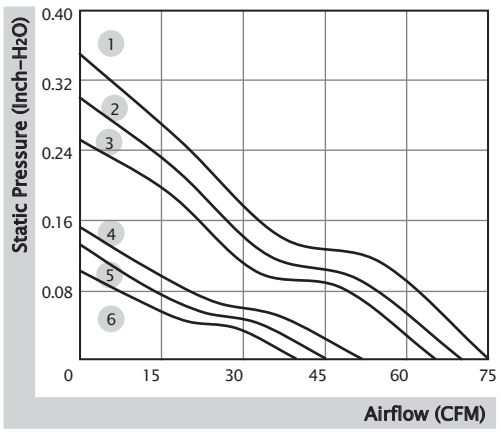

External Dimensions(mm)

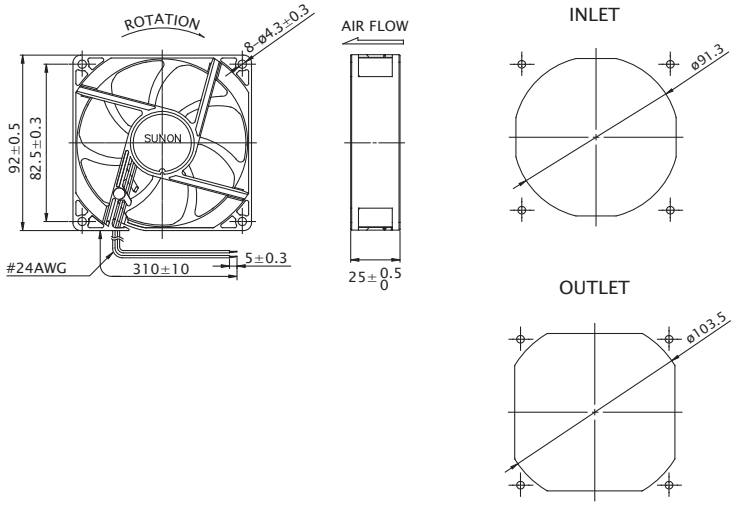

Beijing Hengrui Mechanical and Electrical Equipment Co,Ltd
+86 10-62547612
zhangyu@bjhengrui.cn
en.bjhengrui.com

92x92x25 mm (GR487)

39.5~51.5 CFM




Specification

Model	Bearing	Rated Voltage	Power Current	Power Consumption	Speed	Airflow	Static Pressure	Noise	Weight	Curve
	● 2BALL ○ Sleeve	(VDC)	(mA)	(WATTS)	(RPM)	(CFM)	(inch-H_2O)	(dB(A))	(g)	
GF92251B5-0000-AD9	●	12	165	1.98	3000	51.5	0.15	34.0	99.0	1
GF92251B6-0000-AD9	●	12	135	1.62	2700	45.0	0.13	32.0	99.0	2
GF92251B7-0000-AD9	●	12	91	1.10	2400	39.5	0.10	28.0	99.0	3
GF92252B5-0000-AD9	●	24	87	2.09	3000	51.5	0.15	34.0	99.0	1
GF92252B6-0000-AD9	●	24	65	1.56	2700	45.0	0.13	32.0	99.0	2
GF92252B7-0000-AD9	●	24	47	1.13	2400	39.5	0.10	28.0	99.0	3


Function

R Type : FD9 ／ F Type : GD9

Air Flow-Static Pressure Characteristics

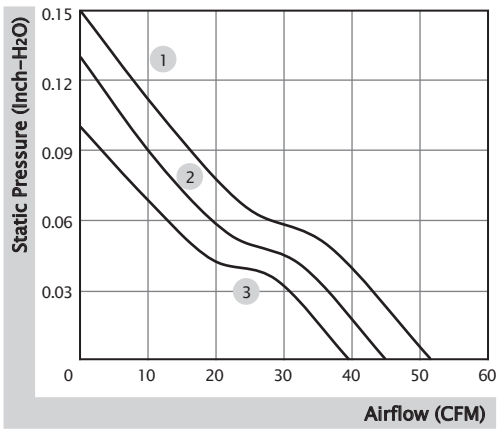

External Dimensions(mm)

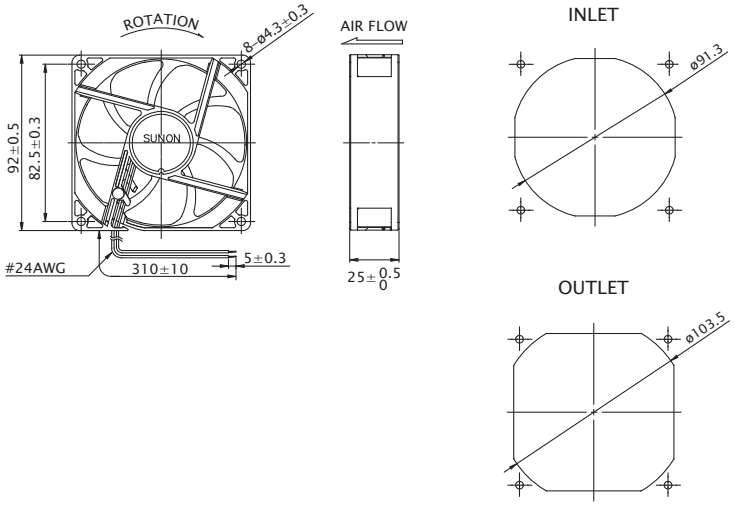

Beijing Hengrui Mechanical and Electrical Equipment Co,Ltd
+86 10-62547612
zhangyu@bjhengrui.cn
en.bjhengrui.com

92x92x38 mm (IP68/GR487)

145.3~172.9 CFM




Specification

Model	Bearing	Rated Voltage	Power Current	Power Consumption	Speed	Airflow	Static Pressure	Noise	Weight	Curve
	● 2BALL ○ Sleeve	(VDC)	(mA)	(WATTS)	(RPM)	(CFM)	(inch-H_2O)	(dB(A))	(g)	
GF92382BX-10000-AEP	●	24	1700	40.80	9000	172.9	1.73	66.8	260.0	1
GF92382B1-10000-AEP	●	24	850	20.40	7200	145.3	1.20	60.6	260.0	2
GF92382BX-10000-ADP	●	24	1700	40.80	9000	172.9	1.73	66.8	260.0	1
GF92382B1-10000-ADP	●	24	850	20.40	7200	145.3	1.20	60.6	260.0	2


Function

(IP68) R Type : FEP ／ F Type : GEP ／ PWM : HEP, QEP, SEP
(GR487) R Type : FDP ／ F Type : GDP ／ PWM : HDP, QDP, SDP

Air Flow-Static Pressure Characteristics

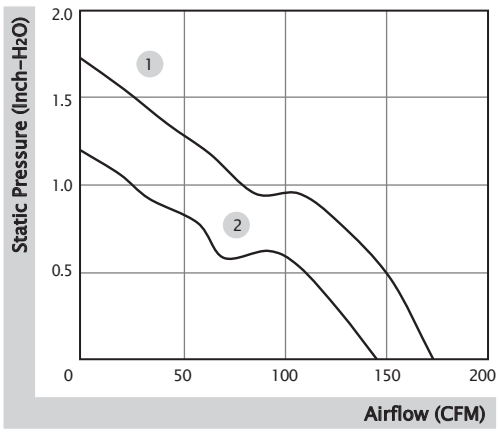

External Dimensions(mm)

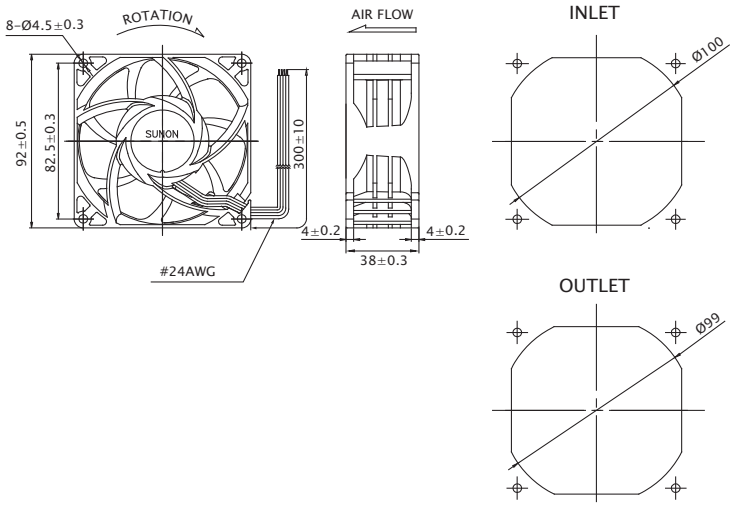

Beijing Hengrui Mechanical and Electrical Equipment Co,Ltd
+86 10-62547612
zhangyu@bjhengrui.cn
en.bjhengrui.com