



The engineer's choice

**ebm**papst

# 612 NH

## INDEX

|          |                                                     |          |
|----------|-----------------------------------------------------|----------|
| <b>1</b> | <b>General .....</b>                                | <b>3</b> |
| <b>2</b> | <b>Mechanics .....</b>                              | <b>3</b> |
| 2.1      | General .....                                       | 3        |
| 2.2      | Connections .....                                   | 3        |
| <b>3</b> | <b>Operating Data.....</b>                          | <b>4</b> |
| 3.1      | Operating Data - Electrical Interface - Input ..... | 4        |
| 3.2      | Electrical Operating Data .....                     | 5        |
| 3.3      | Operating Data - Electrical Interface -Output ..... | 5        |
| 3.4      | Electrical Features .....                           | 5        |
| 3.5      | Aerodynamic .....                                   | 7        |
| 3.6      | Sound Data .....                                    | 7        |
| <b>4</b> | <b>Environment.....</b>                             | <b>7</b> |
| 4.1      | General .....                                       | 7        |
| 4.2      | Climatic requirements*).....                        | 7        |
| <b>5</b> | <b>Safety.....</b>                                  | <b>8</b> |
| 5.1      | Electrical Safety .....                             | 8        |
| 5.2      | Approval Tests .....                                | 8        |
| <b>6</b> | <b>Reliability.....</b>                             | <b>8</b> |
| 6.1      | General .....                                       | 8        |

**1 General**


|                                       |                        |  |
|---------------------------------------|------------------------|--|
| Fan type                              | Fan                    |  |
| Rotational direction looking at rotor | clockwise              |  |
| Airflow direction                     | Air outlet over struts |  |
| Bearing system                        | Ball bearing           |  |
| Mounting position                     | any                    |  |

**2 Mechanics****2.1 General**

|                                                       |                                                                         |  |
|-------------------------------------------------------|-------------------------------------------------------------------------|--|
| Width                                                 | 60,0 mm                                                                 |  |
| Height                                                | 60,0 mm                                                                 |  |
| Depth                                                 | 25,0 mm                                                                 |  |
| Weight                                                | 0,066 kg                                                                |  |
| Housing material                                      | Plastic                                                                 |  |
| Impeller material                                     | Plastic                                                                 |  |
| Max. torque when mounted across both mounting flanges | wire outlet corner: 20 Ncm<br>remaining corners: 40 Ncm                 |  |
| Screw size                                            | ISO 4762 - M3 degreased, without an additional brace and without washer |  |

**2.2 Connections**

|                       |             |  |
|-----------------------|-------------|--|
| Electrical connection | Wires       |  |
| Length of lead wire   | L = 310 mm  |  |
| Tolerance             | + - 10,0 mm |  |
| Wire gauge (AWG)      | 22          |  |
| Insulation diameter   | 1,70 mm     |  |

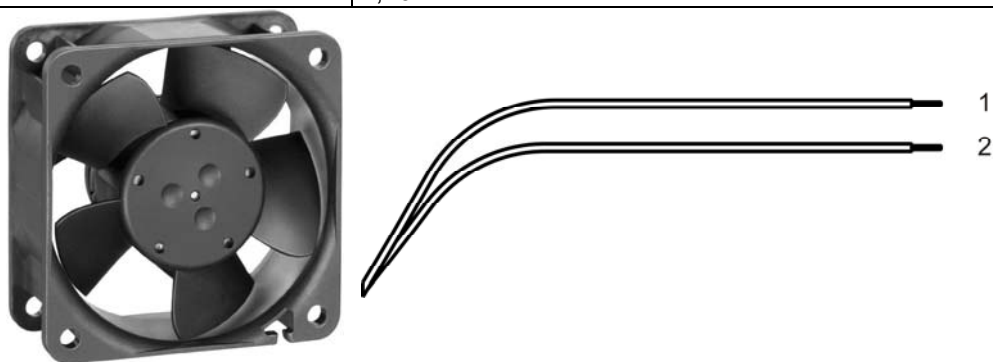

|        | Colour | Operation |
|--------|--------|-----------|
| Wire 1 | red    | + UB      |
| Wire 2 | blue   | - GND     |

### 3 Operating Data

#### 3.1 Operating Data - Electrical Interface - Input

|               |      |
|---------------|------|
| Control input | None |
|---------------|------|

### 3.2 Electrical Operating Data

Measurement conditions: Normal air density = 1,2 kg/m<sup>3</sup>; Temperature 23°C +/- 3°C; Motor axis horizontal; warm-up time before measuring 5 minutes (unless otherwise specified). In the intake and outlet area should not be any solid obstruction within 0,5 m.

$\Delta p = 0$ : corresp. to free air flow (see section 3.5)  
 I: corresp. to arithm. mean current value

| Features                     | Condition      | Symbol | Values      |             |             |
|------------------------------|----------------|--------|-------------|-------------|-------------|
| Voltage range                | $\Delta p = 0$ | U      | 8,0 V       |             | 15,0 V      |
| Nominal voltage              | $\Delta p = 0$ | $U_N$  |             | 12,0 V      |             |
| Power consumption            | $\Delta p = 0$ | P      | 0,7 W       | 1,8 W       | 3,0 W       |
| Tolerance                    | 0001           |        | +/- 17,5 %  | +/- 12,5 %  | +/- 17,5 %  |
| Current consumption          | $\Delta p = 0$ | I      | 88 mA       | 150 mA      | 200 mA      |
| Tolerance                    | 0001           |        | +/- 17,5 %  | +/- 12,5 %  | +/- 17,5 %  |
| Speed                        | $\Delta p = 0$ | n      | 3.570 1/min | 5.600 1/min | 6.930 1/min |
| Tolerance                    | 0001           |        | +/- 15,0 %  | +/- 10,0 %  | +/- 15,0 %  |
| Starting current consumption |                |        |             | 1.090 mA    |             |


### 3.3 Operating Data - Electrical Interface -Output

|            |      |
|------------|------|
| Tacho type | None |
|------------|------|

|            |      |
|------------|------|
| Alarm type | None |
|------------|------|

### 3.4 Electrical Features

|                                    |                                                                      |  |
|------------------------------------|----------------------------------------------------------------------|--|
| Electronic function                | None                                                                 |  |
| Reversed polarity protection       | Rectifying diode                                                     |  |
| Max. residual current at $U_N$     | IF <= 5 $\mu$ A                                                      |  |
| Locked rotor protection            | Auto restart                                                         |  |
| Locked rotor current at $U_N$      | approx. 1.090 mA                                                     |  |
| Clock signal t3/t4 at locked rotor | Typical: 0,2 s / 1,1 s<br>t3: 0,06 s... 0,77 s<br>t4: 0,3 s... 3,6 s |  |

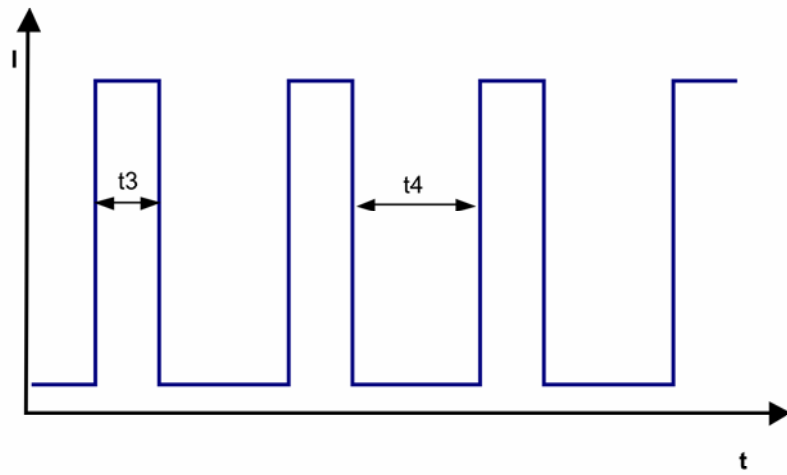

### 3.5 Aerodynamic

Measurement conditions: Measured with a double chamber intake rig acc. to DIN EN ISO 5801.  
Normal air density = 1,2 kg/m<sup>3</sup>; Temperature 23°C +/- 3°C;  
In the intake and outlet area should not be any solid obstruction within 0,5 m.

a.) Operation condition:

|                                                             |                        |  |
|-------------------------------------------------------------|------------------------|--|
| 5.600 1/min at free air flow                                |                        |  |
| Max. free-air flow ( $\Delta p = 0$ / $\dot{V} = \max.$ )   | 43,0 m <sup>3</sup> /h |  |
| Max. static pressure ( $\Delta p = \max.$ / $\dot{V} = 0$ ) | 80 Pa                  |  |

### 3.6 Sound Data

Measurement conditions: Sound pressure level: 1 Meter distance between microphone and the air intake.  
Sound power level: Acc. to DIN 45635 part 38 (ISO 10302)  
Measured in a semianchoic chamber with a background noise level of  $L_p(A) < 5$  dB(A)  
For further measurement conditions see section 3.5

a.) Operation condition:

|                                                                 |                                |  |
|-----------------------------------------------------------------|--------------------------------|--|
| 5.600 1/min at free air flow                                    |                                |  |
| Optimal operating point                                         | 32,0 m <sup>3</sup> /h @ 20 Pa |  |
| Sound power level at the optimal operating point                | 5,2 bel(A)                     |  |
| Sound pressure level at free air flow, measured in rubber bands | 37,0 dB(A)                     |  |

## 4 Environment

### 4.1 General

|                                            |        |  |
|--------------------------------------------|--------|--|
| Min. permitted ambient temperature TU min. | -20 °C |  |
| Max. permitted ambient temperature TU max. | 70 °C  |  |
| Min. permitted storage temperature TL min. | -40 °C |  |
| Max. permitted storage temperature TL max. | 80 °C  |  |

### 4.2 Climatic requirements\*)

|                          |                                                               |  |
|--------------------------|---------------------------------------------------------------|--|
| Humidity requirements    | humid heat, constant; according to DIN EN 60068-2-78, 14 days |  |
| Water exposure           | None                                                          |  |
| Radiation exposure       | None                                                          |  |
| Dust requirements        | None                                                          |  |
| Salt fog requirements    | None                                                          |  |
| Harmful gas requirements | None                                                          |  |

\*) Permitted application area:

The product is intended for use in sheltered rooms with controlled temperature and controlled humidity. Directly exposure to water must be avoided.

Pollution degree 1 (according DIN EN 60664-1)

There is either no pollution or it occurs only dry, non-conductive pollution. The pollution has no negative impact.

## 5 Safety

### 5.1 Electrical Safety

|                                                                                                                                                                                                                                                                                                                                                                                           |                                      |  |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------|--|
| Dielectric strength<br>DIN EN 60950 (VDE 0805) and DIN EN 60335 (VDE 0700)<br>A.) Type test<br>Measuring conditions: After 48h of storage at 95% R.H. and 25°C.<br>No arcing or breakdown is allowed!<br>All connections together to ground.<br>B.) Routine test<br>Measuring conditions: At indoor climate.<br>No arcing or breakdown is allowed!<br>All connections together to ground. | Not applicable<br><br>Not applicable |  |
| Isolation resistance<br>Measuring conditions: After 48h of storage at 95% R.H. and 25°C measured with U=500 VDC for 1 min.                                                                                                                                                                                                                                                                | RI > 10 MOhm                         |  |
| clearance / creepage distance                                                                                                                                                                                                                                                                                                                                                             | 1,0 mm / 1,2 mm                      |  |
| Protection class                                                                                                                                                                                                                                                                                                                                                                          | III                                  |  |

### 5.2 Approval Tests

|     |     |
|-----|-----|
| CE  | Yes |
| UL  | Yes |
| VDE | Yes |
| CSA | Yes |
| CCC | No  |

The approval tests are observed to:


U approval max.: 15,0 V @ TU approval max.: 70,0 °C

## 6 Reliability

### 6.1 General

|                                   |          |  |
|-----------------------------------|----------|--|
| Life expectancy L10 at TU = 40 °C | 70.000 h |  |
| Life expectancy L10 at TU max.    | 35.000 h |  |

Anzahl und Länge der Litze s. Spezifikation  
length and number of wires see design specification

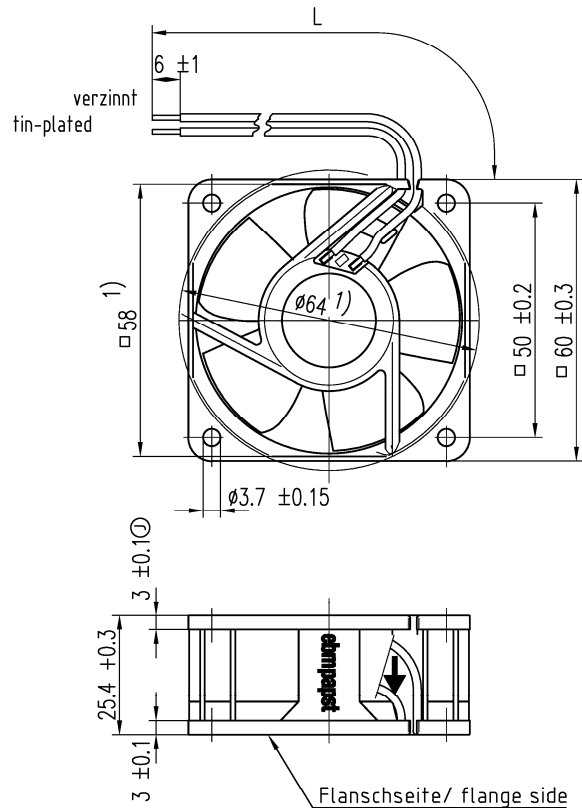

1) Maße für Montagewand

1) dimensions for assembly wall

①

|                                      |                     |                                     |                                  |                              |                     |                           |                       |                       |  |              |  |                |  |
|--------------------------------------|---------------------|-------------------------------------|----------------------------------|------------------------------|---------------------|---------------------------|-----------------------|-----------------------|--|--------------|--|----------------|--|
|                                      |                     |                                     | ebmpapst                         |                              | Werkstoff/Material: |                           |                       | Volumen/Volume (mm³): |  |              |  |                |  |
| SAP-Status/State                     | Änd.-Nr./Change-No. | AutoCAD-System-Version              | CAD-Umgebung/<br>CAD-Environment |                              |                     |                           |                       | Gewicht/Mass (g):     |  |              |  |                |  |
|                                      |                     | Datum/Date                          |                                  | Name/Name                    |                     | Artikel/Title             |                       |                       |  |              |  |                |  |
|                                      |                     | Bearb./Drawn                        |                                  |                              |                     |                           |                       |                       |  |              |  |                |  |
|                                      |                     | Gepr./Checked                       |                                  |                              |                     |                           |                       |                       |  |              |  |                |  |
|                                      |                     | Freig./Released                     |                                  |                              |                     |                           |                       |                       |  |              |  |                |  |
| Tolerierung/Tolerances:              |                     |                                     |                                  |                              |                     |                           |                       |                       |  |              |  |                |  |
| Allgemeintoleranzen/Gen. tolerances: |                     | <b>ebmpapst</b>                     |                                  | Zchg.-Nr./ Drawing.-No.:     |                     |                           | Ers.f.Zchg./Replaces: |                       |  |              |  |                |  |
|                                      |                     |                                     |                                  |                              |                     |                           |                       |                       |  |              |  |                |  |
|                                      |                     | ebm-papst St. Georgen GmbH & Co. KG |                                  | Dokumenttyp/Type of Document |                     | Teildokument (Blatt/Page) |                       | Index/Index           |  | Format/Size: |  | Massstab/scale |  |