

**Product Data Sheet**

**9244014065**

VWC0119XQHCZ

4856ZWU-065

**ebm**papst

The engineer's choice



4856ZWU-065

## INDEX

|          |                                 |           |
|----------|---------------------------------|-----------|
| <b>1</b> | <b>General .....</b>            | <b>3</b>  |
| <b>2</b> | <b>Mechanics .....</b>          | <b>3</b>  |
| 2.1      | General.....                    | 3         |
| 2.2      | Connections.....                | 4         |
| <b>3</b> | <b>Operating Data .....</b>     | <b>5</b>  |
| 3.1      | Electrical Operating Data ..... | 5         |
| 3.2      | Electrical Features .....       | 6         |
| 3.3      | Aerodynamics .....              | 7         |
| 3.4      | Sound Data.....                 | 8         |
| <b>4</b> | <b>Environment.....</b>         | <b>8</b>  |
| 4.1      | General.....                    | 8         |
| 4.2      | Climatic Requirements .....     | 9         |
| <b>5</b> | <b>Safety.....</b>              | <b>9</b>  |
| 5.1      | Electrical Safety .....         | 9         |
| 5.2      | Approval Tests.....             | 10        |
| <b>6</b> | <b>Reliability.....</b>         | <b>10</b> |
| 6.1      | General.....                    | 10        |

## 1 General

|                                     |                        |
|-------------------------------------|------------------------|
| Fan type                            | Fan                    |
| Rotating direction looking at rotor | Clockwise              |
| Airflow direction                   | Air outlet over struts |
| Bearing system                      | Ball bearing           |
| Mounting position - shaft           | Any                    |
| Balancing grade                     | 2,5                    |


## 2 Mechanics

### 2.1 General

|                                                       |                                                                         |  |
|-------------------------------------------------------|-------------------------------------------------------------------------|--|
| Width                                                 | 119,0 mm                                                                |  |
| Height                                                | 119,0 mm                                                                |  |
| Depth                                                 | 38,0 mm                                                                 |  |
| Diameter                                              | 0,0 mm                                                                  |  |
| Mass                                                  | 0,540 kg                                                                |  |
| Housing material                                      | Metal                                                                   |  |
| Impeller material                                     | Metal                                                                   |  |
| Max. torque when mounted across both mounting flanges | Wire outlet corner: 120 Ncm<br>Remaining corners: 350 Ncm               |  |
| Screw size                                            | ISO 4762 - M4 degreased, without an additional brace and without washer |  |

2.2     Connections

|                       |              |  |
|-----------------------|--------------|--|
| Electrical connection | Wires - Plug |  |
| Lead wire length      | L = 1.312 mm |  |
| Tolerance             | + - 25 mm    |  |
| Tube length           | S = 1.260 mm |  |
| Tolerance             | + - 15 mm    |  |
| Wire size (AWG)       | 18           |  |
| Insulation diameter   | 2,06 mm      |  |
| Plug                  | See drawing  |  |
| Contact               | See drawing  |  |

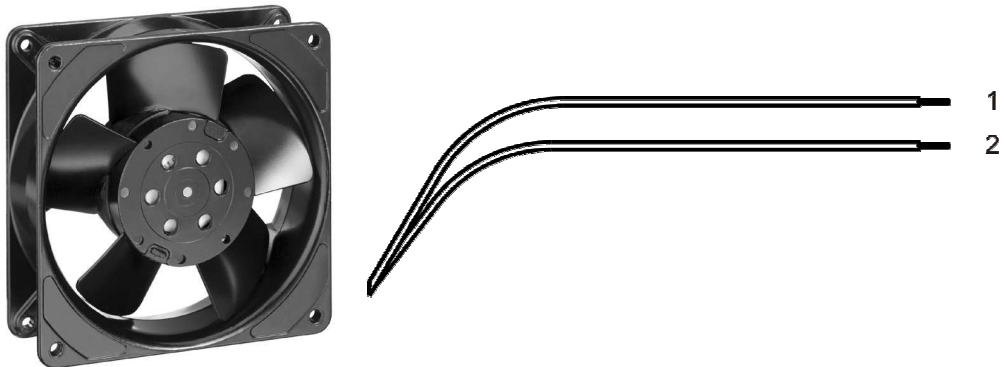

|   |       |           |
|---|-------|-----------|
|   | Color | Operation |
| 1 | black | L         |
| 2 | black | N         |

### 3 Operating Data

#### 3.1 Electrical Operating Data

Measurement conditions: Normal air density = 1,2 kg/m<sup>3</sup>; Temperature 23°C +/- 3°C; Motor axis horizontal; warm-up time before measuring 5 minutes (unless otherwise specified).  
 In the intake and outlet area should not be any solid obstruction within 0,5 m.


$\Delta p = 0$ : corresp. to free air flow (see chapter aerodynamics)

I: corresp. to RMS line current

| Features          | Condition      | Symbol | Values       |              |
|-------------------|----------------|--------|--------------|--------------|
| Frequency         | $\Delta p = 0$ | f      | 50 Hz        | 60 Hz        |
| Nominal voltage   | $\Delta p = 0$ | $U_N$  | 230 V        | 230 V        |
| Tolerance         |                |        | + 6 % - 10 % | + 6 % - 10 % |
| Power consumption | $\Delta p = 0$ | P      | 13 W         | 12 W         |
| Tolerance         |                |        | + - 10 %     | + - 10 %     |
| Speed             | $\Delta p = 0$ | n      | 1.700 1/min  | 1.800 1/min  |
| Tolerance         |                |        | + - 10 %     | + - 10 %     |

3.2 Electrical Features

|                         |           |
|-------------------------|-----------|
| Locked rotor protection | Impedance |
| Locked rotor current at |           |

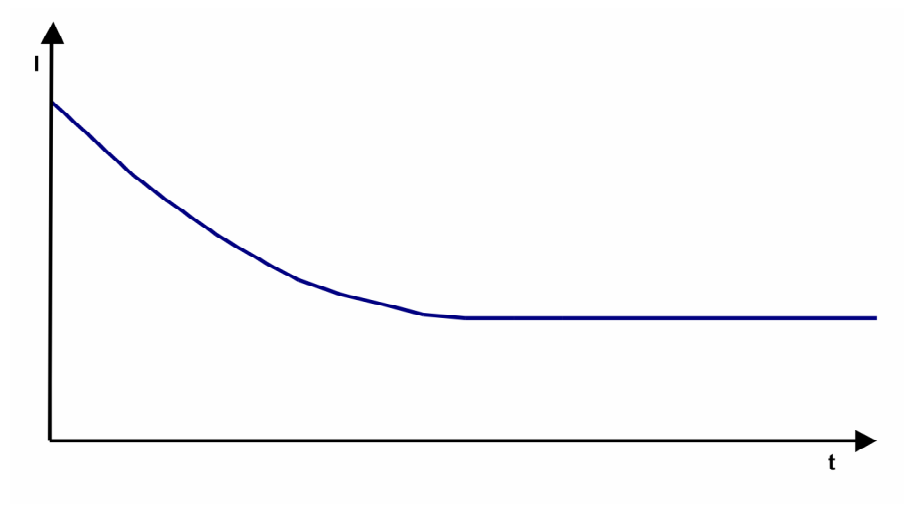

### 3.3 Aerodynamics

Measurement conditions: Measured with a double chamber intake rig acc. to DIN EN ISO 5801.  
Normal air density = 1,2 kg/m<sup>3</sup>; Temperature 23°C +/- 3°C;  
In the intake and outlet area should not be any solid obstruction within 0,5 m. Motor shaft horizontal.  
The information is only valid under the specified test conditions and may be changed by the installation conditions. If there are deviations from the standard test conditions, the characteristic values must be checked under the installed conditions.

a.) Operation condition:

1.700 1/min at free air flow

Frequency: 50 Hz


|                                                           |                        |
|-----------------------------------------------------------|------------------------|
| Max. free-air flow ( $\Delta p = 0 / \dot{V} = \max.$ )   | 98,0 m <sup>3</sup> /h |
| Max. static pressure ( $\Delta p = \max. / \dot{V} = 0$ ) | 27 Pa                  |

b.) Operation condition:

1.800 1/min at free air flow

Frequency: 60 Hz

|                                                           |                         |
|-----------------------------------------------------------|-------------------------|
| Max. free-air flow ( $\Delta p = 0 / \dot{V} = \max.$ )   | 104,0 m <sup>3</sup> /h |
| Max. static pressure ( $\Delta p = \max. / \dot{V} = 0$ ) | 24 Pa                   |

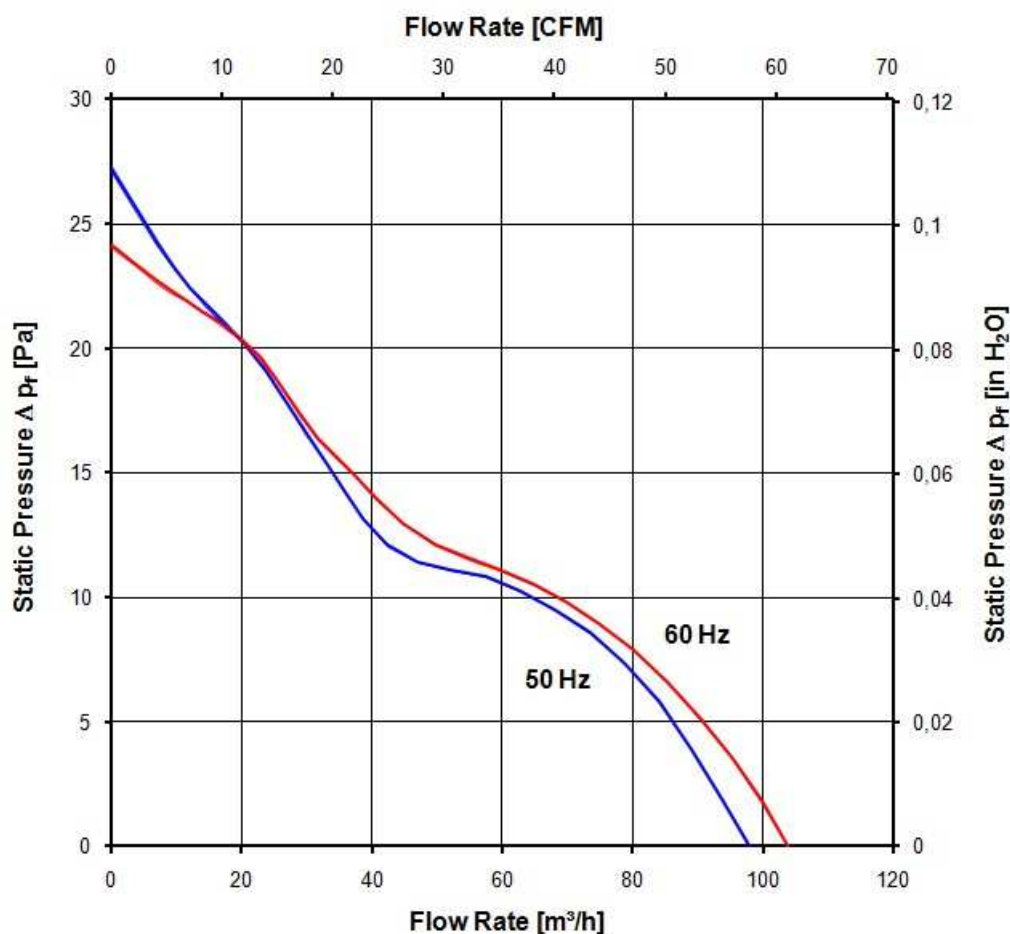

### 3.4 Sound Data

Measurement conditions: Sound pressure level: 1 meter distance between microphone and the air intake.  
Sound power level: Acc. to DIN 45635 part 38 (ISO 10302) Sound power level: Acc. to DIN 45635 part 38 (ISO 10302)  
Measured in a semianchoic chamber with a background noise level of  $L_p(A) < 5 \text{ dB(A)}$   
For further measurement conditions see chapter aerodynamics.

a.) Operation condition:

1.700 1/min at free air flow

Frequency: 50 Hz

|                                                                 |                               |  |
|-----------------------------------------------------------------|-------------------------------|--|
| Optimal operating point                                         | 86,0 m <sup>3</sup> /h @ 5 Pa |  |
| Sound power level at the optimal operating point                | 3,8 bel(A)                    |  |
| Sound pressure level at free air flow, measured in rubber bands | 25,0 dB(A)                    |  |

b.) Operation condition:

1.800 1/min at free air flow

Frequency: 60 Hz

|                                                                 |                               |  |
|-----------------------------------------------------------------|-------------------------------|--|
| Optimal operating point                                         | 89,0 m <sup>3</sup> /h @ 5 Pa |  |
| Sound power level at the optimal operating point                | 3,9 bel(A)                    |  |
| Sound pressure level at free air flow, measured in rubber bands | 27,0 dB(A)                    |  |

## 4 Environment

### 4.1 General

|                                            |                                  |  |
|--------------------------------------------|----------------------------------|--|
| Min. permitted ambient temperature TU min. | -40 °C / 50 Hz<br>-40 °C / 60 Hz |  |
| Max. permitted ambient temperature TU max. | 70 °C / 50 Hz<br>70 °C / 60 Hz   |  |
| Min. permitted storage temperature TL min. | -40 °C                           |  |
| Max. permitted storage temperature TL max. | 80 °C                            |  |

## 4.2 Climatic Requirements

|                                |                                                                                                                                           |  |
|--------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------|--|
| IP-protection type (certified) | IP 65 (for fan only, not for connector if applicable) **)                                                                                 |  |
| Humidity requirements          | humid temperature, cyclic; according to DIN EN 60068-2-38, 10 cycle and condensation water check; according to DIN EN ISO 6270-2, 14 days |  |
| Salt fog requirements          | None                                                                                                                                      |  |

Permitted application area:

The product is for the use in partial sheltered rooms or open, roofed areas. Direct exposure to water is allowed provided that this does not prevent the normal operation. Saline ambient conditions must be avoided.

Pollution degree 3 (according DIN EN 60664-1)

It occurs conductive pollution or dry non-conductive pollution which becomes conductive due to condensation.

\*\*) The specification of the IP protection refers to the conditions mentioned in certification of the fan. The above mentioned short description of the protection scope is not final. For detailed information of the respective protection scope and definitions, see certification as well as DIN EN 60529 (protection by housings) and ISO 20653 (for vehicles) with the letter K.

### **Short description of the IP-protection type:**

Solid particle Protection: Dust tight.

Protection against deliberate contact: Protected against contact to hazardous parts with a wire.

Protection against water: Protected against water jets.

## 5 Safety

### 5.1 Electrical Safety

|                                                                                                                                                                                                                                                                                                                                                                                           |                                            |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------|
| Dielectric strength<br>DIN EN 60950 (VDE 0805) and DIN EN 60335 (VDE 0700)<br>A.) Type test<br>Measuring conditions: After 48h of storage at 95% R.H. and 25°C.<br>No arcing or breakdown is allowed!<br>All connections together to ground.<br>B.) Routine test<br>Measuring conditions: At indoor climate.<br>No arcing or breakdown is allowed!<br>All connections together to ground. | 1500 VAC / 1 Min.<br><br>1500 VAC / 1 Sec. |
| Isolation resistance<br>Measuring conditions: After 48h of storage at 95% R.H. and 25°C measured with U=500 VDC for 1 min.                                                                                                                                                                                                                                                                | RI > 50 MOhm                               |
| Clearance / creepage distance                                                                                                                                                                                                                                                                                                                                                             | 2,0 mm / 1,8 mm                            |
| Protection class                                                                                                                                                                                                                                                                                                                                                                          | I                                          |

## 5.2 Approval Tests

|     |                                                                     |                                                                               |
|-----|---------------------------------------------------------------------|-------------------------------------------------------------------------------|
| CE  | EC Declaration of Conformity                                        | Yes                                                                           |
| EAC | Eurasian Conformity                                                 | Yes                                                                           |
| UL  | Underwriters Laboratories                                           | Yes / UL507, Electric Fans E38324                                             |
| VDE | Association for Electrical, Electronic and Information Technologies | Yes / Approval acc. to EN 60950 (VDE 0805) - Information technology equipment |
| CSA | Canadian Standards Association                                      | Yes / C22.2 No. 113 Fans and Ventilators                                      |
| CCC | China Compulsory Certification                                      | Yes / GB 12350 Safety Requirements for small Power Motors                     |

The approval tests are observed to:

U approval max.: 230 V / f: 60 Hz @ TU approval max.: 85 °C

## 6 Reliability


### 6.1 General

|                                   |                  |  |
|-----------------------------------|------------------|--|
| Life expectancy L10 at TU = 40 °C | 50.000 h / 50 Hz |  |
| Life expectancy L10 at TU max.    | 22.500 h / 50 Hz |  |

Schutzzvermerk nach DIN ISO 16016 beachten/  
Refer to protection notice DIN ISO 16016!


Steckergehäuse /  
Plug housing:  
STOCKO EH 703-003-003-960  
Kontakt / Contact:  
RTB 8212.020

Pinbelegung /  
Pin configuration:  
Pin1 = schwarz / black  
Pin2 = schwarz / black



The diagram shows a top-down view of a rectangular plug housing. It has two circular pin sockets on the left side and two rectangular slots on the right side. A line points from the label 'Pin1' to the top-left pin socket. The label 'Pin2' is positioned below 'Pin1' but has no line pointing to a specific feature.

Technical drawing of a 4X1 connector. The drawing shows a side view of the connector with a cable. A dimension line indicates a length of 52 ± 10. A label '4X1' is shown on the connector body. A callout line points to the label with the text: 'Beschriftung: 4X1 schwarz aufgedruckt, schwebfest, 2,5 mm hoch / Labeling: 4X1 printed in black, smudge-proof, size 2.5 mm'.

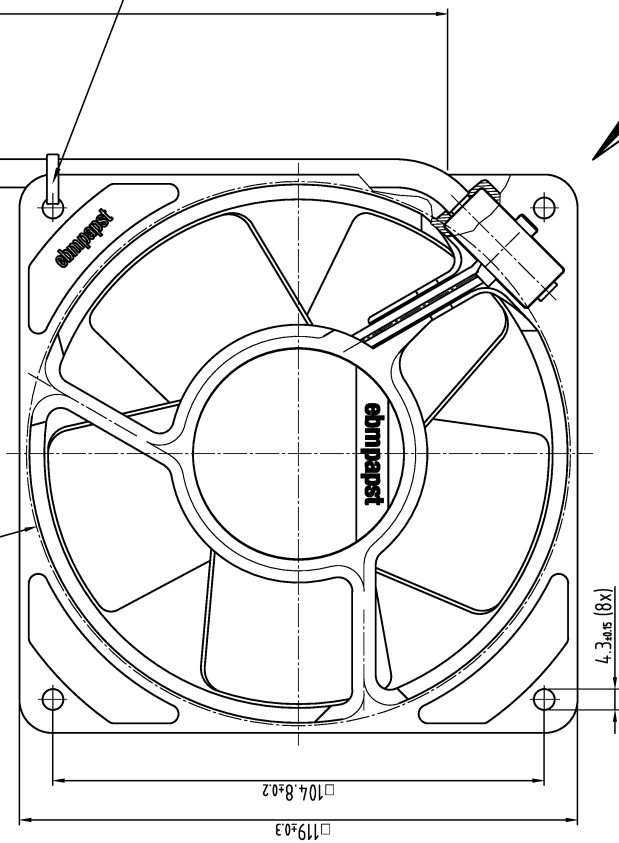

Mit Kabelbinder an der Befestigungsbohrung befestigt. /  
With cable ties fixes on the mounting hole.

- 1) = Maße für Montagewand / Dimensions for assembly wall  
2) = Schraube: Duo-Tapfite nach DIN 7500, CM 4x8, Torx /  
Screw: Duo-Tapfite according DIN 7500, CM 4x8, Torx
- Axialspiel bei Kugellagerung (K): 0 (mit Federausgleich) /  
Axial clearance by ball bearing (K): 0 (by preload spring)
  - Axialspiel bei Gleitlagerung (G): 0,1 - 0,6 /  
Axial clearance by sleeve bearing (G): 0,1 - 0,6

[illegible]