

Product Data Sheet

9295420225

VWS0184XULDZ

2218F/2TDH4OR-225

ebm**papst**

The engineer's choice



2218F/2TDH4OR-225

INDEX

1	General	3
2	Mechanics	3
2.1	General.....	3
2.2	Connections.....	3
3	Operating Data	5
3.1	Electrical Interface - Input.....	5
3.2	Electrical Operating Data	7
3.3	Electrical Interface - Output.....	8
3.4	Electrical Features	9
3.5	Data According ErP Directive	11
3.6	Aerodynamics	12
3.7	Sound Data.....	13
4	Environment.....	13
4.1	General.....	13
4.2	Climatic Requirements	13
4.3	Mechanical Requirements.....	14
5	Safety.....	16
5.1	Electrical Safety	16
5.2	Approval Tests.....	16
6	Reliability.....	16
6.1	General.....	16

1 General

Fan type	Fan	
Rotating direction looking at rotor	Counterclockwise	
Airflow direction	Air outlet over struts	
Bearing system	Ball bearing	
Mounting position - shaft	Any	


2 Mechanics

2.1 General

Width	200 mm	
Height	200 mm	
Depth	51 mm	
Diameter	220 mm	
Mass	1,06 kg	
Housing material	Metal	
Impeller material	Plastic	

2.2 Connections

Electrical connection	Wires - Plug	
Lead wire length	L = 320 mm	
Tolerance		
Plug	See drawing	
Contact	See drawing	

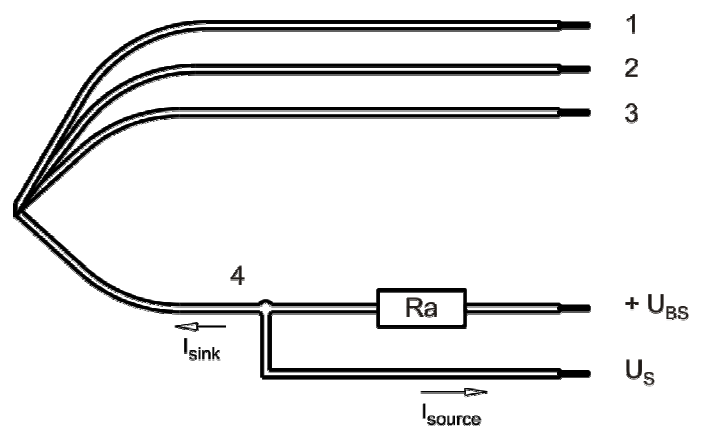

Wire	Color	Operation	Wire size	Insulation diameter
1	red	+ UB	AWG 18	2,2 mm
2	blue	- GND	AWG 18	2,2 mm
3	yellow	CONTR	AWG 20	2,0 mm
4	white	Tacho	AWG 20	2,0 mm

The auxiliaries shown on the schematic diagram (which are required for the intended use) are not part of our delivery.

3 Operating Data


3.1 Electrical Interface - Input

Control input	Analog
---------------	--------


Features

PWM - Frequency	1 kHz - 10 kHz typical: 2 kHz
Input voltage range	0 V - 10 V

Characteristics

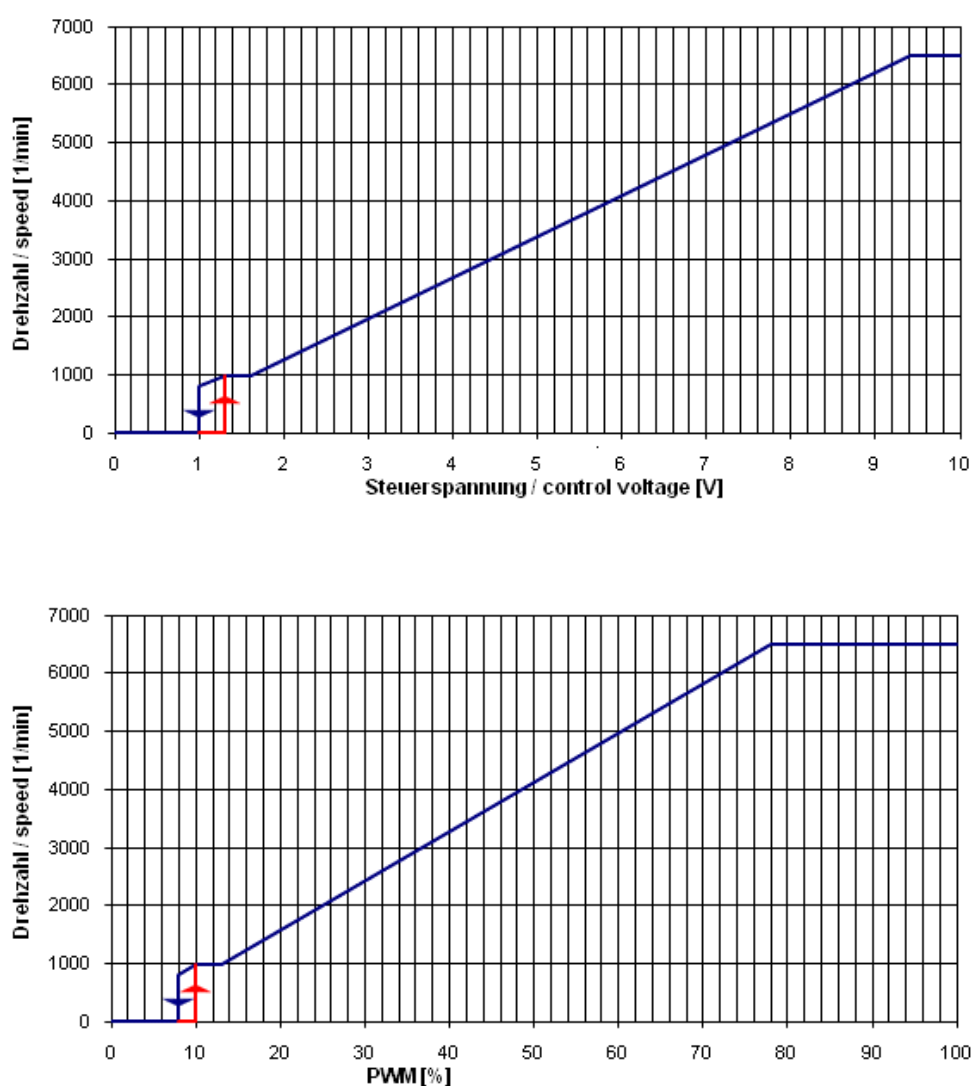

Schematics

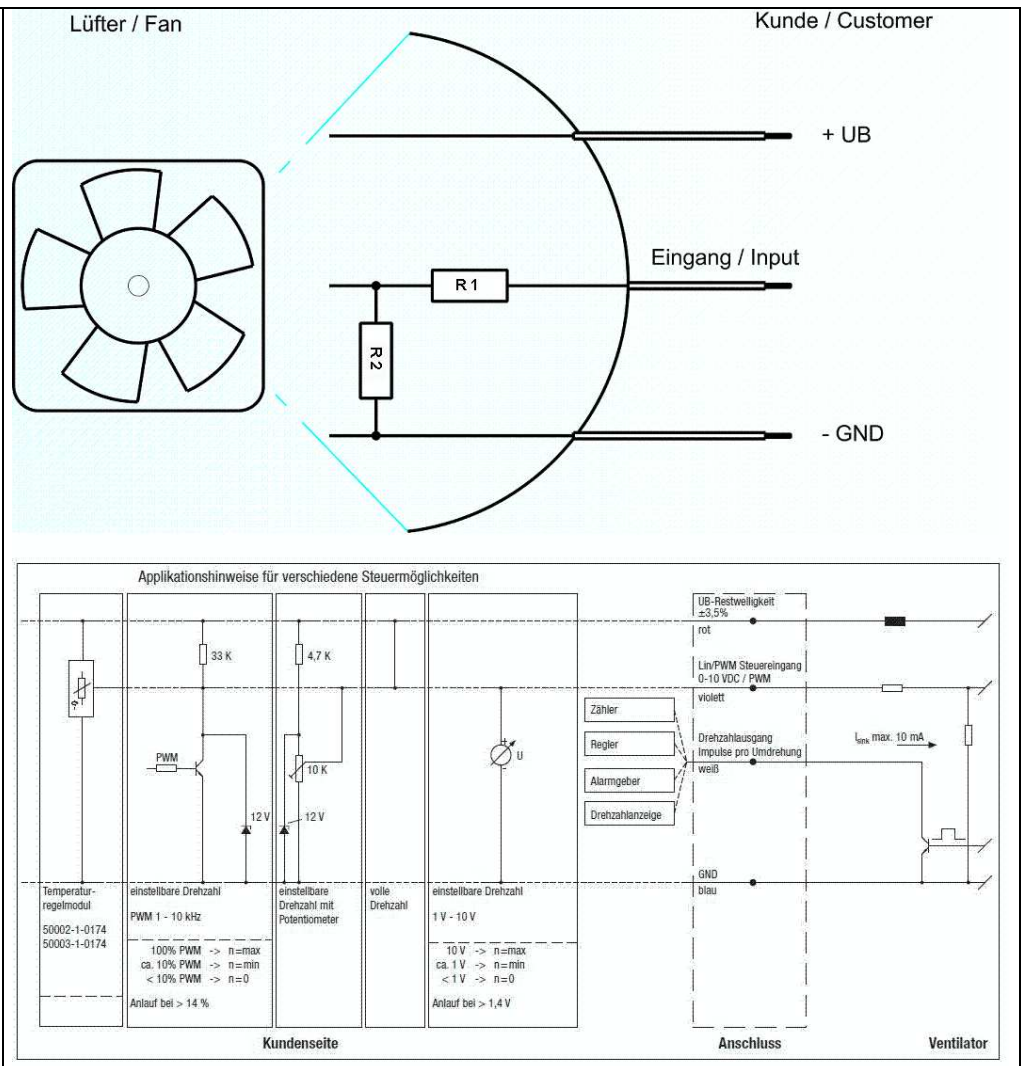**Input voltage divider:**

R1 = 47 kOhm

R2 = 36 kOhm

For protection: There is a 5,1 V Z-Diode in parallel to R2.

Speed control:

By pulse-width modulation (PWM) 0 ... 100%
 with switching transistor in emitter circuit and collector resistor to 12 V
 Frequency = 2 kHz (1 - 10 kHz)

Information to the curve PWM:

0% - <10% PWM:	0 1/min
10% PWM:	1.000 1/min (Fan on, coming from 0% PWM)
10% - 13% PWM:	1.000 1/min (corresponding to min. speed)
13% - 78% PWM:	linear increasing curve
78% - 100% PWM:	6.500 1/min (corresponding to max. speed)
10% - >8% PWM:	linear decreasing curve (coming from 100% PWM)
8% PWM:	800 1/min or 0 1/min (Fan off, coming from 100% PWM)

or:

Speed control:

By analog voltage 0 - 10 V

Information to the curve analog:

0 V - < 1,3 V:	0 1/min
1,3 V:	1.000 1/min (Fan on, coming from von 0 V)
1,3 V - 1,6 V:	1.000 1/min (corresponding to min. speed)
1,6 V - 9,4 V:	linear increasing curve
9,4 V - 10 V:	6.500 1/min (corresponding to max. speed)
1,3 V - > 1,0 V:	linear decreasing curve (coming from 10 V)
1,0 V:	800 1/min or 0 1/min (Fan off, coming from 10 V)

Note:

It must be ensured that the power supply is applied before the control signal (U Contr) is turned on

The fan has no sensor break detection. This means - when the input is not connected, the speed is set to zero.

3.2 Electrical Operating Data

Measurement conditions: Normal air density = 1,2 kg/m³; Temperature 23°C +/- 3°C; Motor axis horizontal; warm-up time before measuring 5 minutes (unless otherwise specified). In the intake and outlet area should not be any solid obstruction within 0,5 m.

$\Delta p = 0$: corresp. to free air flow (see chapter aerodynamics)
I: corresp. to arithm. mean current value


Name	Condition
U Contr. 0001	U Contr.: 10 V

Features	Condition	Symbol	Values		
Voltage range		U	36 V		72 V
Nominal voltage		U _N		48 V	
Power consumption	$\Delta p = 0$	P	76 W	103 W	108 W
Tolerance	U Contr. 0010		+/- 15 %	+/- 10 %	+/- 10 %
Current consumption	$\Delta p = 0$	I	2.100 mA	2.150 mA	1.500 mA
Tolerance	U Contr. 0010		+/- 15 %	+/- 10 %	+/- 10 %
Speed	$\Delta p = 0$	n	5.900 1/min	6.500 1/min	6.500 1/min
Tolerance	U Contr. 0010		+/- 10 %	+/- 3 %	+/- 3 %

3.3 Electrical Interface - Output


Tacho type	/2 (open collector)
------------	---------------------

Signal-Ausgangsspannung / Signal output voltage

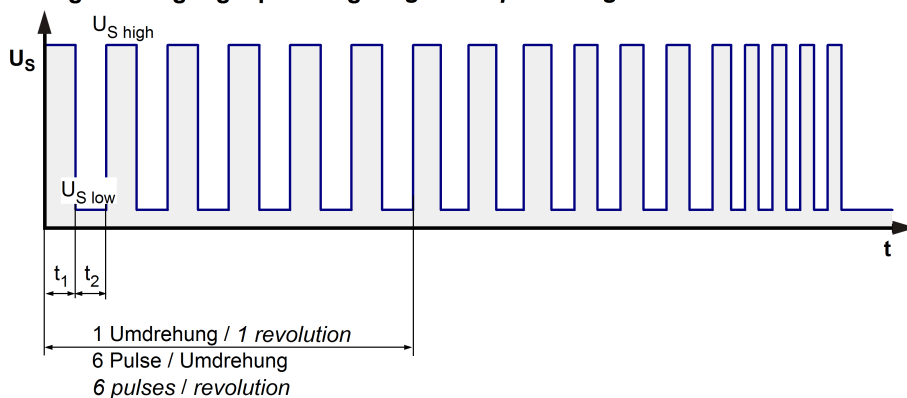


$$R_a = \frac{U_{BS} - U_{S \text{ low}}}{I_{\text{sink}}}$$

Lüfter / Fan Kunde / Customer



Lüfter-Drehzahl / Fan speed

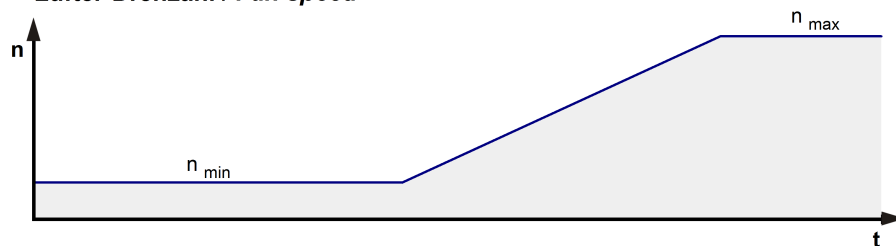


Features	Note	Values
Tacho operating voltage	U_{BS}	$\leq 60 \text{ V}$
Tacho signal Low	$U_{S \text{ low}}$	$\leq 0,4 \text{ V}$
Tacho signal High	$U_{S \text{ high}}$	$\leq 60 \text{ V}$
Maximum sink current	I_{sink}	$\leq 20 \text{ mA}$
External resistor	External resistor R_a from U_{BS} to U_S required. All voltages measured to GND.	
Tacho frequency	$(6 \times n) / 60$	650 Hz @ 6.500 1/min
Tacho isolated from motor	No	
Slew rate		$\Rightarrow 0,5 \text{ V/us}$

n = revolutions per minute (1/min)


3.4 Electrical Features

Electronic function	Speed-Controlled	
Reversed polarity protection	None	
Max. residual current at U_N		
Locked rotor protection	Auto restart	
Locked rotor current at U_N	I_{block} approx. 2.500 mA	
Clock signal at locked rotor	t_3 / t_4 typical: 3,0 s / 10,0 s	
Extended Downtime	t_5 : 40 s after 3 start-up tests	
Internal fuse	Littelfuse NANO2 > Very Fast-Acting > 451/453 Series 10A / 125V (Art.No.: 0451010.MRL)	
Voltage control *)	Fan turns on at $U_B > 34 \text{ V}$ or $< 78 \text{ V}$ Fan turns off at $U_B < 32 \text{ V}$ or $> 80 \text{ V}$	

*) This fan has an undervoltage and overvoltage control circuit integrated which turns the motor off if the voltage is out of range.

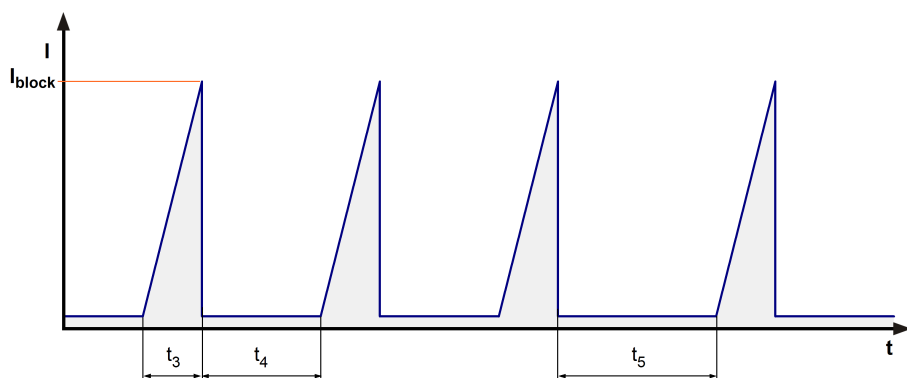

The locked rotor current is measured as peak current at nominal voltage.

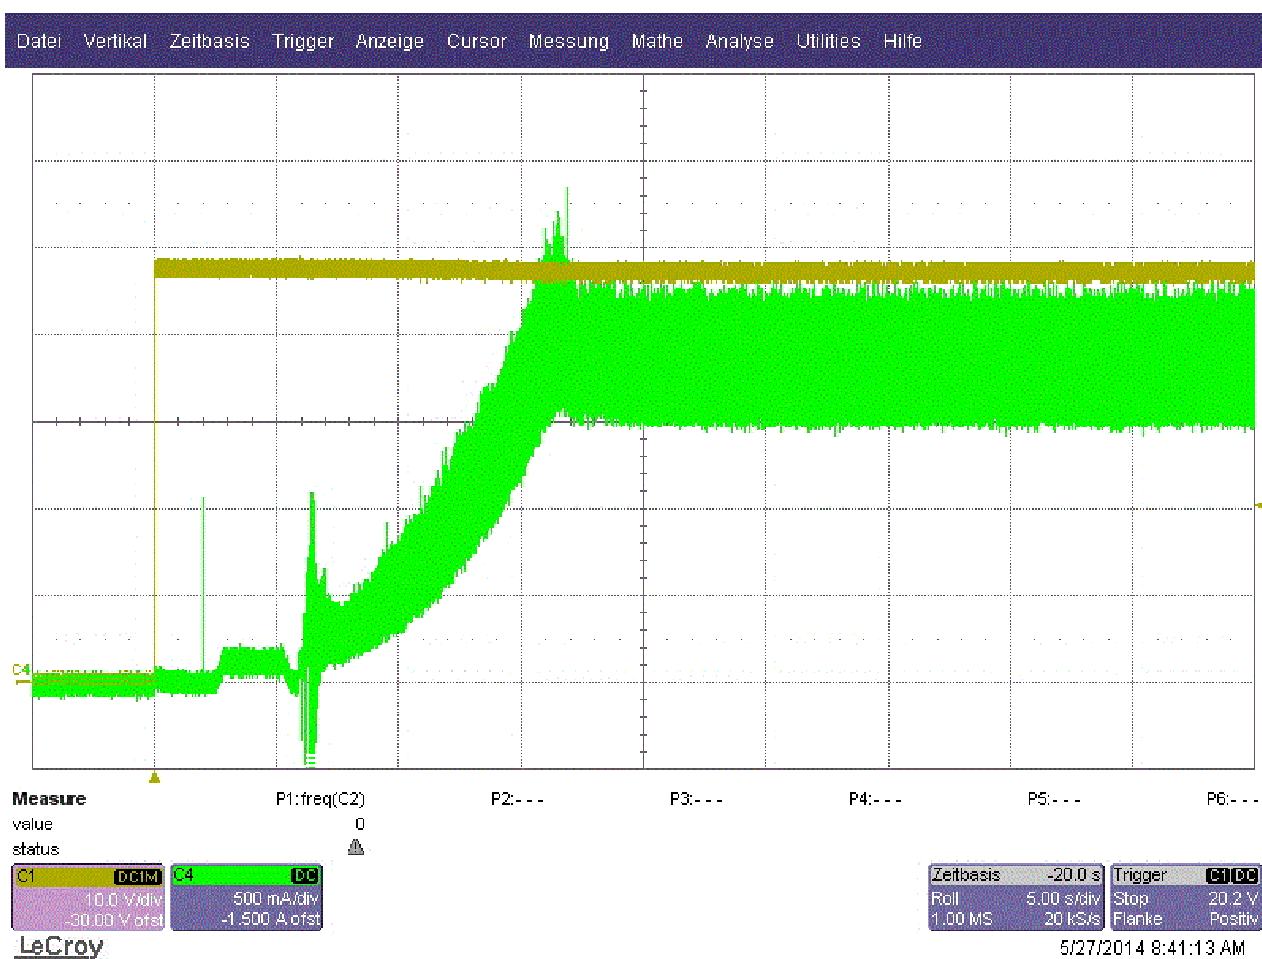

Start_up current @ 48V



Locker rotor current @ 48V

Inrush current limiter:

This fan is equipped with an inrush current limiter to reduce the charging current of the internal capacitor. By this circuit the fan gets a start-up delay of 2s after connecting the supply voltage. Only a short peak current can be measured at the inrush by charging the small internal filter capacitors with approximately 6,6µF.

3.5 Data According ErP Directive

Installation / Efficiency category	A / static
Speed control	integrated
Specific ratio	1,00359
Target overall efficiency 2015	29,1 %
Overall efficiency	52,4 %
Efficiency grade	40
Power input	188 W
Speed	6.570 1/min

All values measured in optimum energy efficiency point.

Productiondatecode is printed on the fan label.

3.6 Aerodynamics

Measurement conditions:

Measured with a double chamber intake rig acc. to DIN EN ISO 5801.

Normal air density = 1,2 kg/m³; Temperature 23°C +/- 3°C;


In the intake and outlet area should not be any solid obstruction within 0,5 m. Motor shaft horizontal.

The information is only valid under the specified test conditions and may be changed by the installation conditions. If there are deviations from the standard test conditions, the characteristic values must be checked under the installed conditions. Power consumption of the fan motor when operating at normal voltage is shown. Depending on the operating conditions of the application, the power input may be higher.

a.) Operation condition:

6.500 1/min at free air flow	U Contr. 10 V		
------------------------------	---------------	--	--

Max. free-air flow ($\Delta p = 0 / \dot{V} = \text{max.}$)	1.220 m ³ /h	
Max. static pressure ($\Delta p = \text{max.} / \dot{V} = 0$)	1.170 Pa	

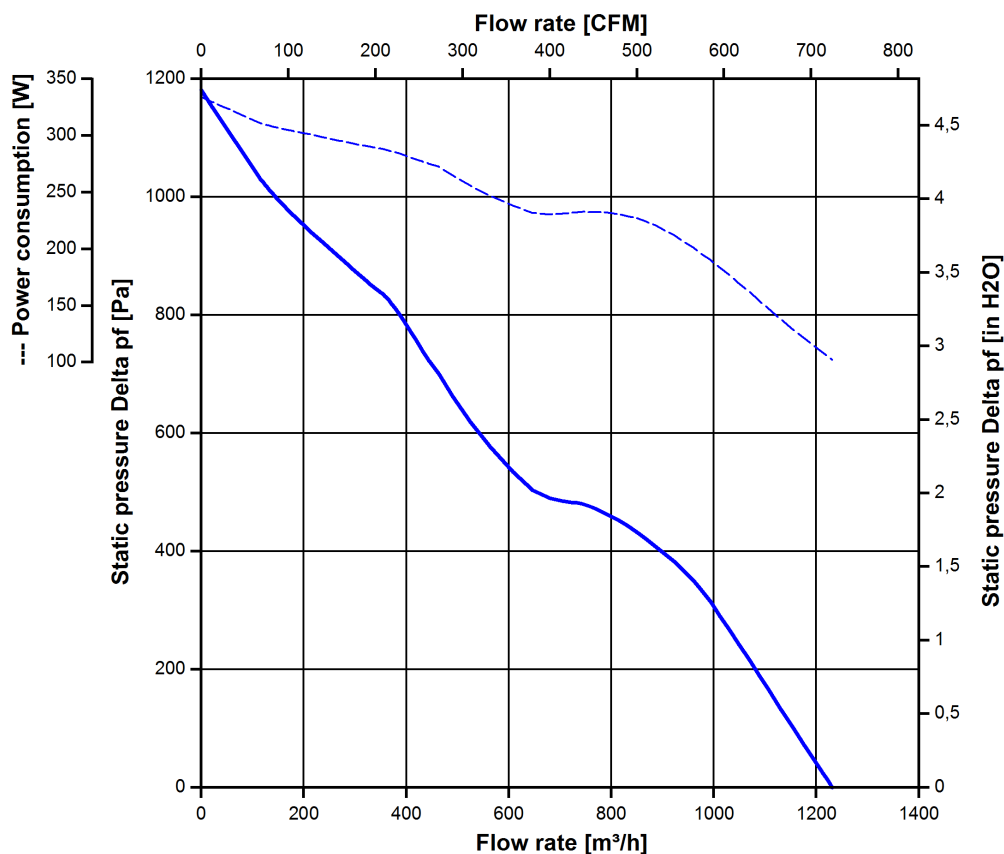

3.7 Sound Data

Measurement conditions: Sound pressure level: 1 meter distance between microphone and the air intake.
Sound power level: Acc. to DIN 45635 part 38 (ISO 10302)
Measured in a semianchoic chamber with a background noise level of $L_p(A) < 5 \text{ dB(A)}$
For further measurement conditions see chapter aerodynamics.

a.) Operation condition:

6.500 1/min at free air flow	U Contr. 10 V		
Optimal operating point	1.200,0 m ³ /h @ 44 Pa		
Sound power level at the optimal operating point	8,2 bel(A)		
Sound pressure level at free air flow, measured in rubber bands	74,0 dB(A)		

4 Environment

4.1 General

Min. permitted ambient temperature TU min.	-20 °C	
Max. permitted ambient temperature TU max.	65 °C	
Min. permitted storage temperature TL min.	-40 °C	
Max. permitted storage temperature TL max.	80 °C	

4.2 Climatic Requirements

Humidity requirements	humid heat, cyclic; according to DIN EN 60068-2-30, 6 cycle	
Water exposure	None	
Dust requirements	Dust check; according to DIN EN 60068-2-68, 6g/m ² d, 1 day	
Salt fog requirements	None	

Permitted application area:

The product is for the use in sheltered rooms with limited controlled temperature. Occasionally condensed water is allowed. Direct exposure to water must be avoided. Saline ambient conditions must be avoided.

Pollution degree 2 (according DIN EN 60664-1)

It occurs only non-conductive pollution. Occasionally, temporary conductivity caused by condensation occurs.

4.3 Mechanical Requirements

severity level	Vibration (sinusoidal)	
2 G	Vibration (sinusoidal) in use IEC 60068-2-6 Displacement / frequency range Acceleration / frequency range Sweep rate Sweep cycles Duration Axes of vibration	Vibration (sinusoidal) 0,15 mm / 10-58, 58-10 Hz 2 G / 58-500-58 Hz 1 Oct./min 10 2 hrs. 3

severity level	stationary use		
1	storage / transportation	Random vibration not in use IEC 60068-2-64 Frequency range / ASD G_{RMS} Axes of vibration Test duration	Random vibration 5 - 20 Hz : $1,0 \text{ m}^2 / \text{s}^3$ 20 - 500 Hz : - 3 dB / Oct 0,91 G 3 3 x 5 h
	storage / transportation	Bump not in use IEC 60068-2-29 Shock spectrum Acceleration Duration Number of bumps (+X, -X, -Y, +Y, -Z, +Z) Total bumps	Bump half sine 18 G 6 ms 100 in each direction 600
	stationary use	Random vibration in use IEC 60068-2-64 Frequency range / ASD G_{RMS} Axes of vibration Test duration	Random vibration 5 - 20 Hz : $2,0 \text{ m}^2 / \text{s}^3$ 20- 150 Hz : - 3 dB / Oct 0,83 G 3 3 x 5 h
	stationary use	Bump in use IEC 60068-2-29 Shock spectrum Acceleration Duration Number of bumps (+X, -X, -Y, +Y, -Z, +Z) Total bumps	Bump half sine 5 G 11 ms 100 in each direction 600

severity level	Railroad application	
1 IEC 61373 Category 1	Random vibration in use IEC 60068-2-64 Frequency range / ASD	Random vibration 5 - 20 Hz : $2,0 \text{ m}^2 / \text{s}^3$

Class B	G_{RMS} Axes of vibration Test duration	20- 150 Hz : - 3 dB / Oct 0,83 G 3 3 x 5 h
	Shock in use IEC 60068-2-27 Shock spectrum Acceleration Duration Number of bumps (+X, -X, -Y, +Y, -Z, +Z) Total bumps	Shock half sine 7 G 18 ms 10 in each direction 60

5 Safety**5.1 Electrical Safety**


Dielectric strength DIN EN 60950 (VDE 0805) and DIN EN 60335 (VDE 0700) A.) Type test Measuring conditions: After 48h of storage at 95% R.H. and 25°C. No arcing or breakdown is allowed! All connections together to ground. B.) Routine test Measuring conditions: At indoor climate. No arcing or breakdown is allowed! All connections together to ground.	1000 VAC / 1 Min. 1700 VDC / 1 Sec.	
Isolation resistance Measuring conditions: After 48h of storage at 95% R.H. and 25°C measured with U=500 VDC for 1 min.	RI > 10 MOhm	
Clearance / creepage distance	1,0 mm / 1,5 mm	
Protection class	I	

5.2 Approval Tests

CE	EC Declaration of Conformity	Yes
EAC	Eurasian Conformity	Yes
UL	Underwriters Laboratories	Yes / UL507, Electric Fans E38324
VDE	Association for Electrical, Electronic and Information Technologies	Yes / Approval acc. to EN 60950 (VDE 0805) - Information technology equipment
CSA	Canadian Standards Association	Yes / C22.2 No. 113 Fans and Ventilators
CCC	China Compulsory Certification	Yes / GB 12350 Safety Requirements for small Power Motors

6 Reliability**6.1 General**

Life expectancy L10 at TU = 40 °C	70.000 h	
Life expectancy L10 at TU max.	40.000 h	
Life expectancy L10 acc. to IPC 9591 at TU = 40 °C	117. 500 h	



Steckerghause / Plug housing:
Molex 39-01-2085
Kontakt / Contact:
Molex 39-00-0038

ISO Standard/Size	Asm. Dr. / Change-No.		CMTA System Version / CMTA-System-Version 935540223 CPM08- 422570234 CPM08-	CAD-Shop/Dr. CAD-Entwurf	Volume / Volumen (m³) Gewicht / Masse (kg)
Toleranzen / Tolerances:			ISO-Referenzcode / ISO-Referenzcode: Name		
			Bohr-/ Bohr	Datum	
			Sperr-/ Sperr		
			Flans-/ Flans		
Alle Angaben in mm / Alle dimensions in mm. Tolerances:			Zeich.-Nr. / Drawing No.:		Eign. z. Zeich. / Replaces:
			Dokumenttyp / Type of Document	Zeichnung / Drawing (sheet)	Format / Size: Massstab/Scale
			ebm papst - ST-Engineering GmbH & Co. KG		

- 1) Maße für Montageausschnitt
- Axialspiel der Kugellager mit Feder spielfrei gelagert
- 1) measures of mounting cut out
ball bearing without clearance by a pre-load spring